




cellofoam®


# FLUTE FILLER

## COMMERCIAL ROOF \* RE-ROOF APPLICATIONS

- Provides a uniform, stable and level substrate for new roof cladding
- Specify Density to Meet Compression Requirements
  - Custom Cut to Accurately Fit Each Project
  - Available in Square and Tapered Edge
  - No Thermal Drift–Warranted R-value
  - Improve R-value of Roof Assembly

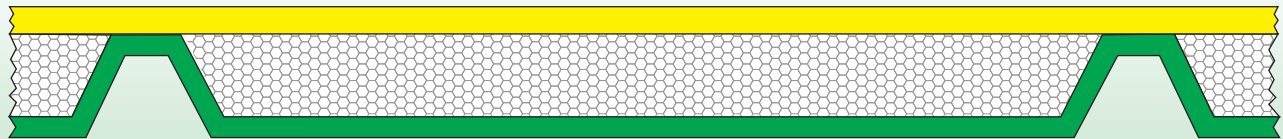

TAPERED EDGE

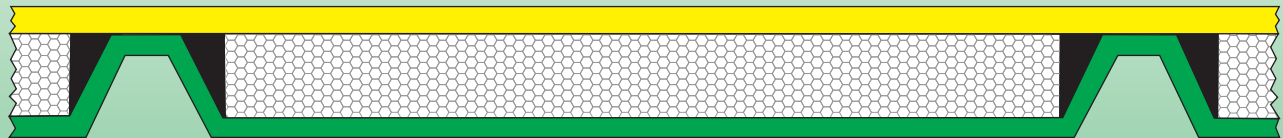

SQUARE EDGE

	R-Value per Inch *	Compressive Strength
Cellofoam Type I	3.85	10psi
Cellofoam Type VIII	3.92	13psi
Cellofoam Type II	4.17	15psi
Cellofoam Type IX	4.35	25psi

\* R-Value based on ASTM C-578

\* Design values @75° mean temp.